

FOSCAM

Enjoy Security Life

FI9851P




iOS APP



Android APP



P2P

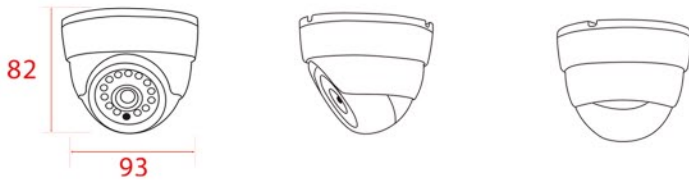

720P(1280X720) Display Resolution



Motion Detection via Email and FTP



Day/Night Surveillance



Supports Wireless 11N Connection



Compatible with Free Foscam iOS and Android APP



Digital Zoom



H.264 Video Compression



Embedded Free Foscam DDNS Service



Instant Access by QR Code Scanning



Embedded IR-Cut Filter



Compatible with ONVIF-embedded NVR/NAS



2-year Limited Warranty

Specification

ITEMS		FI9851P
Image Sensor	Sensor	High Definition Color CMOS Sensor
	Display Resolution	1280 x 720 (1.0M Pixels)
	Min. Illumination	0 Lux (With IR Illuminator)
Lens	Lens Type	Glass Lens
	focal length	f:2.8mm, 3.6mm/4mm/6mm/8mm Option
	Aperture	F1.2
	Angle of View	70°
Video	Image Compression	H.264
	Image Frame Rate	30fps(60Hz), 25fps(50Hz), downward adjustable
	Resolution	720P(1280 x 720), VGA(640 x 480), QVGA(320 x 240)
	Stream	dual stream
	Image adjustment	The hue, brightness, contrast, saturation, sharpness are adjustable
	Flip image	flip and mirror
	Infrared mode	Automatic or manual
	Night visibility	With 13pcs IR-LEDs, Night Vision Range up to 10m
Network	Ethernet	One 10/100Mbps RJ45 port
	Wireless Standard	IEEE802.11b/g/n
	Data Rate	IEEE802.11b: 11Mbps(Max.); IEEE802.11g: 54Mbps(Max.); IEEE802.11n: 150Mbps(Max.).
	Wireless Security	WEP, WPA, WPA2
	Network Protocol	IP, TCP, UDP, HTTP, HTTPS, SMTP, FTP, DHCP, DDNS, UPnP, RTSP, ONVIF
System Requirements	Operating System	Microsoft Windows 2000/XP, Vista, 7,8; Mac OS
	Browser	Microsoft IE6 and above version or compatible browser; Mozilla Firefox; Google Chrome; Apple Safari.
Other Features	Motion Detection	Alarm via E-Mail, upload alarm snapshot to FTP
	Privacy Block	Set privacy area manually
	User Accounts	Three levels user role
	Firewall	Supports IP Filtering
	Reset	Reset button is available
Power	Power Supply	DC 12V/1.0A
	Power Consumption	4.2 Watts (Max.)
Physical	Dimension(LxWxH)	93(L)x 93(W)x 82(H)
	Net Weight	290g
Environment	Operating Temperature	-20°C ~ 55°C(-4°F ~ 131°F)
	Operating Humidity	10% ~ 80% non-condensing
	Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
	Storage Humidity	0% ~ 90% non-condensing
Certification	CE, FCC, RoHS	
Warranty	Limited 2-year warranty	

ShenZhen Foscam Intelligent Technology Co., Ltd.

Address: North Wing,5/F,Block 1,Vision Shenzhen Business Park, No 9 Gaoxin 9th South Road, Hi-tech Industrial Park, Nanshan District,518057,PRC.

Tel: +86-755-26745668

Fax: +86-755-26745168

Sales E-mail: sales@foscam.com

Support E-mail: tech@foscam.com

Website: www.foscam.com